

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
2 December 2004 (02.12.2004)

PCT

(10) International Publication Number  
WO 2004/103810 A1

(51) International Patent Classification<sup>7</sup>: B63H 11/08,  
B60F 3/00

(21) International Application Number:  
PCT/GB2004/002135

(22) International Filing Date: 19 May 2004 (19.05.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0311495.6 19 May 2003 (19.05.2003) GB

(71) Applicant (for all designated States except US): GIBBS  
TECHNOLOGIES LIMITED [GB/GB]; Avenue Road,  
Nuneaton, Warwickshire CV11 4LY (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): GIBBS, Alan, Tim-  
othy [GB/GB]; 28 Albert Bridge House, 127 Albert Bridge  
Road, London SW11 4PL (GB). JENKINS, Neil, Gra-  
ham [GB/GB]; Mancetter Cottage, South Street, Ather-  
stone, Warwickshire CV9 1ED (GB).

(74) Agents: PLUCKROSE, Anthony, William et al.; Boul-  
Wale Tennant, Verulam Gardens, 70 Gray's Inn Road, Lon-  
don WC1X 8BT (GB).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,

GB, GD, GH, GI, GM, GR, GU, HD, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,  
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).


#### Declarations under Rule 4.17:

as to applicant's entitlement to apply for and be granted  
a patent (Rule 4.17(ii)) for the following designations AE,  
AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ,  
CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE,  
EG, ES, FI, GB, GD, GE, GH, GM, GR, GU, HD, IL, IN, IS,  
JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA,  
MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM,  
PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ,  
TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM,  
ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA,  
SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ,  
BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE,  
BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE,  
IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent  
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE,  
SN, TD, TG)

of inventorship (Rule 4.17(iv)) for US only

[Continued on next page]

(54) Title: A JET DRIVE FOR AN AMPHIBIOUS VEHICLE

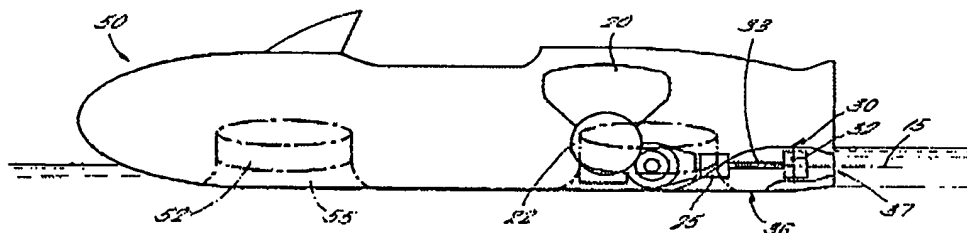

(57) Abstract: Amphibious vehicle (50), with reference to fig. 4, has jet drive (30) packaged behind power train (20, 22), but also configured to produce sufficient thrust for planing, despite drag created by open arches around retractable wheels (52). The ratio of thrust to jet intake length is at least 18kN/m. The ratio of fluid inlet area to fluid outlet area may be between (2.5) and (3.5). The rate of fluid flow through the jet may be 0 to 1.5 m<sup>3</sup>/sec. The maximum thrust may be 7700N, from an engine peak power of less than 135kW, with a jet less than 860mm long. The jet drive shaft may be skewed laterally; and may be cantilevered from a bearing in the conduit wall; which bearing may be rotated when the vehicle is driven on roads. Water flow through the jet may be reversible; alternatively, a reversing bucket may be fitted.

WO 2004/103810 A1

WO 2004/103810 A1



Published:

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

10/557294

IAP20 Rec'd PCT/PTO 18 NOV 2005

WO 2004/103810

PCT/GB2004/002135

- 1 -

A JET DRIVE  
FOR AN AMPHIBIOUS VEHICLE

The present invention relates to a jet drive, and in  
5 particular to a jet drive for use in an amphibious vehicle.

Jet drives are commonly employed in marine vessels as an  
alternative means of propulsion to shaft driven propellers, stern  
drives or outboard motors. A jet drive generates a propulsive  
10 thrust in a first direction as a result of a reaction force  
created upon forcing a jet of water in a second opposite  
direction.

Conventional jet drives have overall aspect ratios of at  
15 least 5:1, more typically 6:1; where the overall aspect ratio is  
calculated as the axial length of the fluid flow path through the  
jet drive divided by the mean diameter of the impeller. Such jet  
drives are designed to power marine vessels having smooth hulls  
from standing (i.e. fully displaced) up to speed, including  
20 speeds where sufficient hydrodynamic lift is generated due to  
speed through water that the hull rises up out of the water onto  
the plane. A conventional jet drive is designed for maximum  
thrust at high jet speeds to maximise the top speed achievable by  
the vessel. Furthermore, the aspect ratio of a conventional jet  
25 intake, calculated as its length over its width, varies from 1.9  
to 3.3 or even more.

Whilst conventional jet drives have proved to be ideal  
propulsion means for dedicated marine vessels, they have not done  
30 so for amphibious vehicles. An amphibious vehicle presents quite  
unique problems and considerations both in terms of performance  
and packaging requirements. There is a need to optimise  
performance of the vehicle both in marine and land modes and to  
cater for the transition between marine and land modes and vice-  
35 versa. This presents conflicting requirements and it has been  
found that conventional jet drives are poorly suited to the  
requirements of an amphibious vehicle, it not being possible to  
optimise both on-water and on-land performance.

WO 2004/103810

PCT/GB2004/002135

- 2 -

In the past, designers of amphibious vehicles have focussed their efforts on optimising either on-water or on-land performance. As a result, either on-water performance has been sacrificed in order to give satisfactory on-land performance, or on-land performance sacrificed to give satisfactory on-water performance.

Conversely, the present applicant has preferred to design an amphibious vehicle having optimised on-land and on-water performance. To this end, the applicant has gone against conventional thinking and overcome previous technical prejudices in arriving at the jet drive according to the present invention.

In particular, the applicant has found it desirable for the hull of an amphibious vehicle to have shallow deadrise angles (approximately 5 degrees) as compared to that of a conventional planing hull (10 to 25 degrees). This enables sufficient ground clearance when on land without compromising handling and performance of the vehicle in land mode by having to raise mechanical components and occupant seating to suit conventional deadrise angles. This would increase frontal area, and thus aerodynamic drag; and also raise the centre of gravity, thus increasing cornering roll and decreasing passenger comfort. The adoption of low dead rise angles is contrary to what has been previously accepted as being necessary for a planing marine hull.

Furthermore, the hull of an amphibious vehicle is not as smooth as that of a dedicated marine hull due to the need for wheel arch cut outs to accommodate retractable wheels. In the past, designers have expended great effort in providing complex moving cover mechanisms for such wheel arch cut outs to re-establish the smooth uninterrupted lines of a conventional marine hull when the wheels are retracted. This is done in order to minimise the through water drag of the hull, and to optimise on-water performance. The higher the drag coefficient of a hull, the more difficult it is for that hull to be a planing hull. Alternatively, in the past, one solution was to omit wheel arch cut outs completely. Instead, the road wheels were kept outboard of the hull in both the protracted or lowered (on-land), and the

retracted or raised (on-water) condition. Indeed, in certain cases, road wheels are fixed in a lowered position both in land and marine modes. This arrangement also has consequences for both on-water and on-land performance due to the unusual weight distributions and increased wheel track dimension.

In the amphibious vehicle of the present applicant, however, wheel arch cut outs in the hull have been retained but optimised to minimise through water drag as far as possible, as described in the applicant's co-pending UK patent application no. 0311499.8 entitled 'A Hull For An Amphibious Vehicle'. No wheel arch covers are used. A net increase in the drag coefficient of the hull as compared to that of a dedicated marine hull has thus been accepted.

As such, the present applicant has been able to optimise on-land vehicle handling and performance at the expense of reduced dead rise angles and increased water drag of the hull. This route has challenged conventional thinking, but has resulted in an amphibious vehicle which can still achieve sufficient through water speed and hydrodynamic lift to get the vehicle up onto the plane. As such, on-water performance is not compromised. This has been achieved using a jet drive which provides enhanced thrust at low jet speeds, to overcome the increased drag and reduced dead rise angle, and so to power the amphibious vehicle up onto the plane. Conventional marine jet drives cannot provide this performance.

Furthermore, in order to obtain satisfactory on-water performance, and in particular to achieve satisfactory planing characteristics in an amphibious vehicle, it has been found that a mid- or rear-mounted engine is preferred, with driven rear wheels. This optimises weight distribution on water, and also helps optimise on-road performance. This arrangement presents packaging problems in terms of the amount of space available for a jet drive and for the power transmission thereto. Conventional marine jet drives cannot be accommodated satisfactorily in an amphibious vehicle when the engine is mid- or rear-mounted and the rear wheels are driven, because the rear axle differential

heavily restricts the space available for the water jet intake. Again, the jet drive according to the present invention has been developed with an aspect ratio of less than 4:1, preferably less than 3.2:1, and yet beneficially achieves the low speed increased thrust requirements. The short intake used results in an intake length to width ratio less than 1.5, preferably less than 1.2; or even more preferably, less than 0.95. Thus, the jet drive can be packaged within tight confines, to the extent that there is no overhang of the jet drive beyond the rear transom of the vehicle. This is important from several aspects. Firstly, it prevents a sharp object such as a steering nozzle or reversing bucket protruding beyond the bodywork of the vehicle, where they can suffer damage through grounding, backing into kerbs, etc. Secondly, it enables rear end crash protection to be improved, as there is clearance between the jet drive intake duct and the differential housing, allowing controlled displacement of the jet drive in an impact.

Another advantage of enhanced jet thrust at low engine speed is found when leaving or entering water. It is helpful, for example, to have good jet thrust available when landing on a slipway, to increase grip at the driven road wheels; particularly as marine drag is increased at this stage due to the road wheels being in their protracted positions. Furthermore, marine steering is more effective as more thrust is available; steering control when leaving water being of course more crucial than in open water. If rear wheel drive is used, as is convenient and appropriate with a mid- or rear-mounted engine for good weight distribution for planing, the non-driven front wheels will hit the slipway first; so enhanced low-speed jet thrust is particularly helpful until the rear wheels touch ground. It is also clearly essential for marine drive to remain engaged until road wheel drive is fully effective; so the rotating speeds of these two systems must be compatible.

In order to provide enhanced thrust at low jet speeds, it is necessary to use a relatively large diameter impeller. Once this decision has been taken, two further benefits in particular flow from the unconventional proportions used.

First, the relatively large difference between the impeller housing diameter and the impeller hub diameter allows improvements in energy efficiency, corresponding to those found in high bypass ratio aircraft jet engines. This is due to three factors: one is the reduced influence of boundary layers, because a smaller proportion of the water flow loses energy through frictional contact with housing and hub. The second is lower frictional losses due to lower mean water velocity; and the third is that the kinetic energy input (one half of mass times velocity squared) falls faster than the momentum output (mass times velocity) at the necessarily reduced rotating speeds.

The second initially unexpected advantage of a large diameter jet is in the area of cavitation - the formation of "bubbles" of vacuum which implode adjacent to the impeller blades as they are powered through the water. Such activity damages the blades by pulling chips of metal off their surfaces - an effect known as spalling - and creates unwelcome noise and a concomitant loss in efficiency.

The onset of cavitation is strongly related to blade tip speed; so a larger diameter jet must run slower. However, small impeller blades are also particularly liable to induce cavitation, due to the large pressure difference between their pressure surfaces and their suction surfaces. If the load is spread over a larger blade area, the difference in pressure can be reduced, leading to a lower likelihood of cavitation.

Prior art displacement amphibious vehicles having marine jet drives require increased jet speed for increased thrust, but also consequentially increase wheel speeds when passing from water to land. This led to difficulties in obtaining grip when the wheels touch ground; and wastage of power before grounding by churning up water around spinning wheels. It is clear that if adequate jet thrust for effective marine to land conversion is available at a jet speed of say, 1000 rpm, rather than a typical 2500 rpm required by prior art jet drives, a much lower wheel speed will result than with a prior art jet drive, if the road

transmission is driven at the same speed as the marine transmission. To express this conversely, once the road wheel transmission is engaged, the rotation of the wheels in the water will increase the load on the whole power train; thus limiting the attainable engine speed. Hence the jet speed is automatically reduced, and good jet thrust is essential.

The present invention thus addresses the limitations of prior art jet drives and provides a jet drive having particular utility in amphibious vehicle applications.

The present invention provides, in a first aspect, a jet drive for an amphibious vehicle comprising:

a fluid inlet;

a fluid outlet;

a conduit extending from the fluid inlet to the fluid outlet and defining a fluid flow path therebetween; and a rotatable impeller housed within the conduit between the fluid inlet and fluid outlet, characterized in that:

the ratio of the axial length of the conduit to the diameter of the impeller is less than 4.0.

Preferred embodiments of the present invention will now be described by way of example only with reference to the accompanying drawings, in which:

Figure 1 is a perspective view of a jet drive and powertrain for an amphibious vehicle in accordance with a first preferred embodiment of the present invention;

Figure 2 is a schematic sectional view from one side of the jet drive of Figure 1;

Figure 3 is a plan view from underneath of the jet drive intake, on line A-A' in Figure 2; and

Figure 4 is a schematic illustration of the jet drive and powertrain of Figure 1 packaged in an amphibious vehicle.

Referring first to Figure 1, there is shown a jet drive and powertrain arrangement 10 comprising a jet drive 30 and an internal combustion engine 20. A transmission 22 transfers drive from the internal combustion engine 20 to two wheel driveshafts 23 and to a power take off shaft 24. A decoupler 25 is



- 7 -

optionally provided for selectively engaging the power take off shaft 24 with a drive shaft 33 of the jet drive 30. Numeral 15 denotes a central longitudinal axis of the vehicle. It is conventional, but not essential, to locate the axis of jet impeller 32 on such an axis.

In Figure 2, the jet drive 30 can be seen to comprise a housing 34 which defines a conduit 35 in which a rotatable impeller 32 is housed. The housing 34 defines a fluid inlet 36 located upstream of the impeller 32, a fluid outlet 37 located downstream of the impeller 32, and a fluid flow path therebetween. The fluid inlet 36 may be provided with a screen filter (not shown) to prevent the ingress of unwanted bodies into the fluid flow path of the jet drive 30. The fluid outlet 37 acts as a discharge nozzle for the exiting fluid jet. A first end of the drive shaft 33 passes through a wall of the housing 34 into conduit 35 and is supported by a bearing 47. The drive shaft 33 extends inside the conduit 35 and the impeller 32 is mounted on a second distal end of the drive shaft 33. The drive shaft 33 acts as a cantilever, the drive shaft 33 and impeller 32 being cantilevered from the housing wall via bearing 47.

It should be noted that not only are some impellers tapered from front to rear, as shown; but also that some impeller blades have complex swept forms or curved edges. For the avoidance of doubt as to how to measure the impeller diameter, all ratios expressed within this specification which relate to the impeller diameter have been calculated in terms of the more easily defined mean internal diameter of the impeller housing (i.e. mean conduit diameter); which should of course be measured in the housing area surrounding the blades. Where the impeller and housing are tapered longitudinally, on a straight or curved taper, the mean diameter of the impeller housing in the area swept by the blades should be used for all calculations relating thereto.

A stator 31 may optionally be provided in the fluid flow path between the impeller 32 and the fluid outlet 37. The stator 31 is provided with stator vanes which are arranged so as to remove the rotational elements of the fluid flow exiting the

WO 2004/103810

PCT/GB2004/002135

- 8 -

impeller 32, thus presenting a uniform inline jet of fluid at the fluid outlet 37. A duct liner (not shown) may be fitted around impeller 32, to protect the jet housing against abrasion. Its inside diameter would of course be considered as the effective  
5 internal diameter of the jet impeller housing 34 (i.e. the impeller diameter).

The dimensions of the jet drive 30 are important in terms of performance and packaging within an amphibious vehicle, as  
10 will now be described. The axial length of the fluid flow conduit is measured along the vehicle from point 42 at the front of intake 36 to point 45 at outlet 37. This dimension is preferably between 0.3m and 2.0m; more preferably between 0.7m and 1.0m; and in a particularly preferred embodiment, substantially equal to  
15 0.85m.

The mean impeller housing internal diameter is measured around the outside of the blades, and is preferably between 0.1m and 0.66m; more preferably between 0.25m and 0.33m; and in a  
20 particularly preferred embodiment is substantially 0.30m.

The ratio between the axial length of the conduit to the mean impeller housing internal diameter is preferably less than 4.0; more preferably less than 3.2; and in a particularly  
25 preferred embodiment is substantially 2.9.

The width of the jet intake is measured between points 42 and 43 in Figure 3, as compared to the jet intake length, which is measured between point 42 and cutwater 44 in Figure 2. The  
30 ratio of intake length to width is preferably between 0.4 and 1.5; more preferably between 0.7 and 1.2; and in a particularly preferred embodiment is substantially 0.95. The intake length may be substantially 0.41m.

It should be noted that in practice, both the front and  
35 rear of the jet intake may be of curved form in side view. Where the front of the intake is curved, point 42 may be taken as the point at which the intake diverges upwards from the flat plane of the hull adjacent to arrow A at the front of the intake.

Alternatively, if the point at which the front of the intake curves upwards from the flat hull plane is unclear, a location of point 42 may be calculated by projecting a line from a steadily sloping section of the jet intake; or from a point of inflection therein; and measuring the intersection of this line with the flat plane of the hull. Similarly, cutwater 44 may be defined as the most forward point on a radius in vertical cross-section at the rearward end of the jet intake.

In order to improve the planing characteristics of the amphibious vehicle, a ride plate may be fixed below the jet intake area as described in the applicant's co-pending UK patent application no. 0311499.8 entitled 'A Hull For An Amphibious Vehicle'. Any reduction in jet intake area would be negated by the increase in the available planing area. The ride plate would conventionally be a pressing, fastened to or through the jet housing casting. Hence for the purposes of calculations of areas and ratios, a ride plate is regarded as an accessory to the jet assembly, whose ratios according to design remain unchanged.

The fluid inlet area of a water jet is conventionally measured on a plane from the cutwater at right angles to the fluid flow through the jet. This is shown in figure 2 as a dashed line joining cutwater 44 to point 46 on the housing. The outlet area is measured at outlet 37.

For the jet characteristics required for a planing amphibious vehicle, the ratio of fluid inlet area to fluid outlet area is preferably in the range 2.5 to 3.5; more preferably in the range 2.8 to 3.2; and in a particularly preferred embodiment is substantially 3.03.

Furthermore, the inlet area may preferably be between  $0.020\text{m}^2$  and  $0.400\text{m}^2$ ; more preferably between  $0.040\text{m}^2$  and  $0.150\text{m}^2$ ; and in a particularly preferred embodiment is substantially  $0.081\text{m}^2$ . The corresponding outlet area may preferably be between  $0.010\text{m}^2$  and  $0.150\text{m}^2$ ; more preferably between  $0.020\text{m}^2$  and  $0.060\text{m}^2$ ; and in a particularly preferred embodiment is substantially  $0.027\text{m}^2$ .

The flow rate through the jet drive may vary from zero -at rest- to  $1.5\text{m}^3\text{s}^{-1}$  at maximum operating speed. In a particularly preferred embodiment, the flow rate is substantially  $0.2\text{m}^3\text{s}^{-1}$  at an impeller speed of 600 rpm; and substantially  $1.1\text{m}^3\text{s}^{-1}$  at an impeller speed of 3000 rpm.

The stator inlet diameter is substantially equal to the impeller outlet diameter, and is preferably between 0.11m and 0.66m; more preferably between 0.25m and 0.35m; and in a particularly preferred embodiment, is substantially 0.30m. The diameter of the nozzle at the jet output end may be substantially 0.185m.

Packaging of the jet drive 30 and engine 20 in a vehicle 50 with retractable wheels 52 is illustrated in Figure 4.

Whilst in the preferred embodiment described the powertrain 20 has been described as comprising an internal combustion engine and mechanical transmission 22, it will be appreciated that any prime mover and power transmission system may be used to implement the jet drive according to the present invention. For example, the prime mover may be a spark ignition or compression ignition internal combustion engine, an electric motor, a fuel cell, a hybrid engine or any combination thereof. The transmission of power from the prime mover to the jet drive may be effected using any conventional means such as direct mechanical drive via drive shafts, manual or automatic transmission or continuously variable transmission. Alternatively, hydraulic or electric power transmission means may be implemented using hydraulic or electric pumps/generators and motors.

Furthermore, the prime mover may be mounted transversely as shown in the figures and as described in the applicant's co-pending application published as WO 02/07999; or longitudinally, as is found convenient. An example of a power train comprising a longitudinally mounted prime mover may be found in the applicant's co-pending application published as WO 02/12005.

Drive shaft 33 may conveniently be mounted substantially parallel to the vehicle longitudinal axis 15, as is shown in the figures. However, this layout may result in significant transmission damage if the vehicle is struck from behind in an accident. It may therefore be preferable to introduce a lateral and/or vertical angle to the vehicle longitudinal axis in the mounting of the drive shaft 33 in the vehicle. This encourages the jet drive assembly to move laterally and/or vertically under rear impact conditions. In this case, one or more universal joints ("UJ's"); or preferably constant velocity ("CV") joints; may be fitted to at least one end of the drive shaft, preferably adjacent to decoupler 25 and/or adjacent to the jet intake housing, to ensure smooth running. A suitable rearward joint position is shown at 48 in figure 2. Alternatively, a joint and bearing may be provided just forward of the impeller. This has the advantage of providing improved support for the impeller, but obstructs water flow through the intake duct; and must have highly effective sealing against water ingress.

Such a skewed drive shaft may also accommodate the effects on the marine drive shaft of driveline shunt where a transverse engine is fitted. Driveline shunt is caused by a transverse engine rocking backwards and forwards on its mountings as power is applied and removed, and could be damaging to a substantially longitudinal drive shaft. Finally, as is known in the automotive engineering art, two universal joints could be fitted at opposite ends of the shaft; but ninety degrees out of phase with each other in a rotational sense, to dampen out transmission vibrations.

To allow the amphibious vehicle to brake or to travel in reverse on water, there are two possible solutions. One is to provide a reversing bucket downstream of the jet fluid outlet, as is known in the marine jet drive art. Reversing buckets provide efficient and controllable reverse drive, but are unsightly on a road vehicle. Where the jet is driven through the road wheel transmission, the alternative is to use the transmission reverse gear to drive the impeller in an opposite direction to that

required for forward motion of the vehicle to effect a braking or a reversing function.

5 As an example of the efficient performance of the jet drive described above, it has been found that an amphibious vehicle travelling over water at a speed of 8.7 knots ( $4.5\text{ms}^{-1}$ ) at a trim angle between ten and fifteen degrees, will rise onto the plane despite having a through water drag co-efficient greater than 0.27 under these conditions.

10 Furthermore, a jet drive according to the construction described above has been found to generate a peak bollard pull of at least 7.7kN from an engine peak power of less than 135kW, within a jet overall length of less than 860mm. Indeed, the  
15 bollard pull thrust may be as high as 7.95kN.

WO 2004/103810

PCT/GB2004/002135

- 13 -

## CLAIMS

1. A jet drive for an amphibious vehicle comprising:  
a fluid inlet;  
5 a fluid outlet;  
a conduit extending from the fluid inlet to the fluid outlet and defining a fluid flow path therebetween; and  
a rotatable impeller housed within the conduit between the fluid inlet and fluid outlet, wherein:  
10 the ratio of thrust to intake length of the jet drive is at least 18,000 Newtons per metre.
2. A jet drive as claimed in claim 1 wherein the ratio of the thrust to the overall length of the jet drive is at least 8,000  
15 Newtons per metre.
3. A jet drive as claimed in claim 1 or claim 2 wherein the ratio of the overall length of the jet drive to the intake length is between 2.01 and 2.11.  
20
4. A jet drive as claimed in any one of the preceding claims wherein the ratio of the jet overall length to the engine power is less than 7 millimetres per kilowatt.
- 25 5. A jet drive as claimed in any one of the preceding claims wherein the ratio of the thrust to the impeller diameter is at least 25000 Newtons per metre.
6. A jet drive as claimed in any one of the preceding claims  
30 wherein the ratio of the jet nozzle diameter to the engine power is at least 1.3 millimetres per kilowatt.
7. A jet drive as claimed in any one of the preceding claims wherein the ratio of the jet nozzle diameter to the impeller  
35 diameter is at least 0.6.
8. A jet drive as claimed in any one of the preceding claims wherein the ratio of the jet nozzle diameter to the overall length of the jet drive is at least 0.21.

WO 2004/103810

PCT/CB2004/002135

- 14 -

9. A jet drive as claimed in any one of the preceding claims wherein the ratio of fluid inlet area to fluid outlet area is in the range 2.5 to 3.5.
- 5 10. A jet drive as claimed in any one of the preceding claims wherein the ratio of fluid inlet area to fluid outlet area is in the range 2.6 to 3.2.
- 10 11. A jet drive as claimed in any one of the preceding claims wherein the ratio of fluid inlet area to fluid outlet area is substantially 3.03.
- 15 12. A jet drive as claimed in any one of the preceding claims wherein the fluid inlet area is in the range  $0.020\text{m}^2$  to  $0.400\text{m}^2$ , and the fluid outlet area is in the range  $0.010\text{m}^2$  to  $0.150\text{m}^2$ .
- 20 13. A jet drive as claimed in any one of the preceding claims wherein the fluid inlet area is in the range  $0.040\text{m}^2$  to  $0.150\text{m}^2$ , and the fluid outlet area is in the range  $0.020\text{m}^2$  to  $0.060\text{m}^2$ .
- 25 14. A jet drive as claimed in any one of the preceding claims wherein the fluid inlet area is substantially  $0.081\text{m}^2$ , and the fluid outlet area is substantially  $0.027\text{m}^2$ .
15. A jet drive as claimed in any one of the preceding claims wherein the rate of fluid flow through the jet drive is in the range  $0\text{m}^3\text{s}^{-1}$  to  $1.5\text{m}^3\text{s}^{-1}$ .
- 30 16. A jet drive as claimed in any one of the preceding claims wherein the rate of fluid flow through the jet drive varies from substantially  $0.2\text{m}^3\text{s}^{-1}$  when the impeller is driven at 600rpm to substantially  $1.1\text{m}^3\text{s}^{-1}$  when the impeller is driven at 3000rpm.
- 35 17. A jet drive as claimed in any one of the preceding claims further comprising a stator housed within the conduit between the impeller and the fluid outlet.
18. A jet drive as claimed in claim 18 wherein the stator has



WO 2004/103810

PCT/GB2004/002135

- 15 -

an inlet diameter in the range of 0.11m to 0.66m.

19. A jet drive as claimed in claim 18 or claim 19 wherein the stator has an inlet diameter in the range of 0.25m to 0.35m.

5

20. A jet drive as claimed in any one of claims 17 to 19 wherein the stator has an inlet diameter of substantially 0.305m.

10

21. An amphibious vehicle comprising a jet drive as claimed in any of the preceding claims wherein the ratio of thrust to engine power is at least 0.05 Newtons per Watt.

15

22. An amphibious vehicle comprising a jet drive as claimed in any one of claims 1 to 20 or an amphibious vehicle as claimed in claim 21 wherein the jet drive generates a peak bollard pull of at least 7kN from an engine peak power of less than 135kW, within a jet overall length of less than 860mm.

20

23. An amphibious vehicle as claimed in claim 22 wherein the peak bollard pull is at least 7.7kN.

25

24. An amphibious vehicle comprising a jet drive as claimed in any one of claims 1 to 20 or an amphibious vehicle as claimed in any one of claims 21 to 23 wherein the impeller can be driven in an opposite direction to that required for forward motion of the vehicle to effect a braking or a reversing function.

30

25. An amphibious vehicle comprising a jet drive as claimed in any one of claims 1 to 20 or an amphibious vehicle as claimed in any one of claims 21 to 24 further comprising a drive shaft linking a power take off of an engine to a jet input of the jet drive, wherein the drive shaft is skewed horizontally and/or vertically relative to the longitudinal axis of the vehicle.

35

26. An amphibious vehicle as claimed in claim 25 further comprising at least one universal joint affixed to the drive shaft.

WO 2004/103810

PCT/GB2004/002135

- 16 -

27. An amphibious vehicle as claimed in claim 25 or claim 26 further comprising at least one constant velocity joint affixed to the drive shaft.

5 28. An amphibious vehicle as claimed in any one of claims 24 to 27 which is fully contained within the amphibious vehicle such that no part of the jet drive extends out of the vehicle.

10 29. A jet drive for an amphibious vehicle comprising:  
a fluid inlet;  
a fluid outlet;  
a conduit extending from the fluid inlet to the fluid outlet and defining a fluid flow path therebetween; and  
15 a rotatable impeller housed within an impeller housing in the conduit between the fluid inlet and fluid outlet, wherein:  
the ratio of the axial length of the conduit to the mean internal diameter of the impeller housing is less than 4.0.

20 30. A jet drive as claimed in claim 29 wherein the ratio of the axial length of the conduit to the mean internal diameter of the impeller housing is less than 3.2.

25 31. A jet drive as claimed in claim 29 or claim 30 wherein the ratio of the axial length of the conduit to the mean internal diameter of the impeller housing is substantially 2.9.

30 32. A jet drive as claimed in any one of claims 29 to 31 wherein the axial length of the conduit is in the range 0.3m to 2.0m, and the mean internal diameter of the impeller housing is in the range 0.1m to 0.66m.

35 33. A jet drive as claimed in any one of claims 29 to 32 wherein the axial length of the conduit is in the range 0.7m to 1.0m and the mean internal diameter of the impeller housing is in the range 0.25m to 0.33m.

34. A jet drive as claimed in any one of claims 29 to 33 wherein the axial length of the conduit is substantially 0.85m and the mean internal diameter of the impeller housing is

WO 2004/103810

PCT/GB2004/002135

- 17 -

substantially 0.295m.

5 35. Use of a jet drive as claimed in any one of claims 1 to 20 or claims 29 to 34 to propel an amphibious vehicle operating in marine mode.

10 36. Use of a jet drive as claimed in any one of claims 1 to 20 or claims 29 to 34 to propel an amphibious vehicle operating in marine mode to a speed where sufficient hydrodynamic lift is achieved for the vehicle to plane.

15 37. Use of a jet drive as claimed in any one of claims 1 to 20 or claims 29 to 34 to propel an amphibious vehicle having a through water drag co-efficient greater than 0.27 at a speed of 8.7 knots ( $4.5\text{ms}^{-1}$ ) and a trim angle between ten and fifteen degrees, the jet drive propelling the vehicle when operating in marine mode to a speed where sufficient hydrodynamic lift is achieved for the vehicle to plane.

20 38. An amphibious vehicle incorporating the jet drive as claimed in any one of claims 1 to 20 or claims 29 to 34.

25 39. A jet drive substantially as hereinbefore described with reference to or as shown in Figures 2 and 3 of the accompanying drawings.

30 40. Use of a jet drive substantially as hereinbefore described with reference to or as shown in Figures 2 and 3 of the accompanying drawings.


41. An amphibious vehicle incorporating a jet drive substantially as hereinbefore described with reference to or as shown in Figures 2 and 3 of the accompanying drawings.

WO 2004/103810

PCT/GB2004/002135

1/4


FIG. 1.

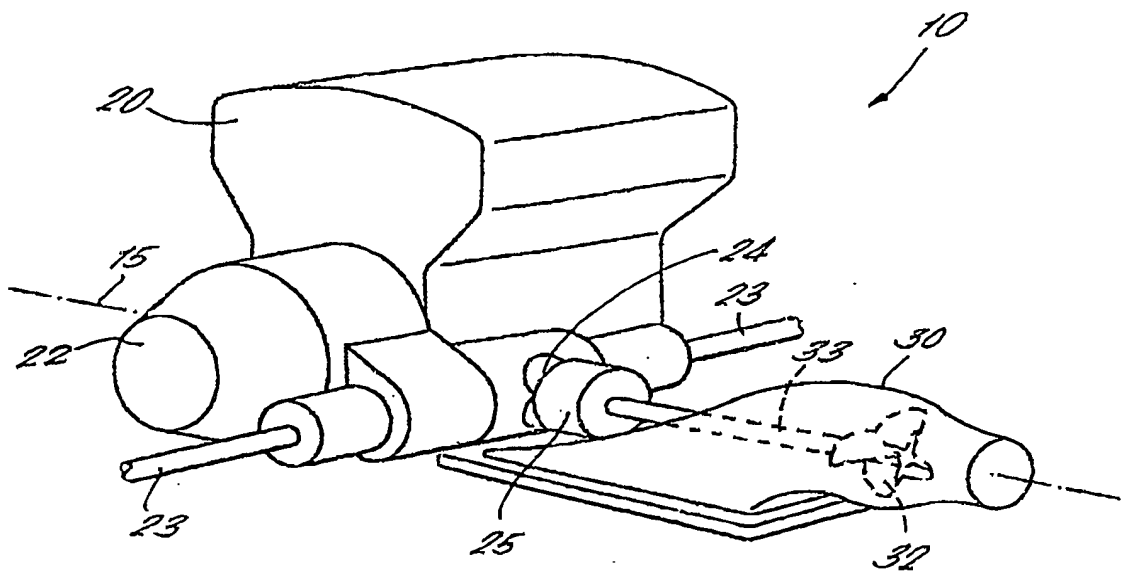

WO 2004/103810

PCT/GB2004/002135

2/4

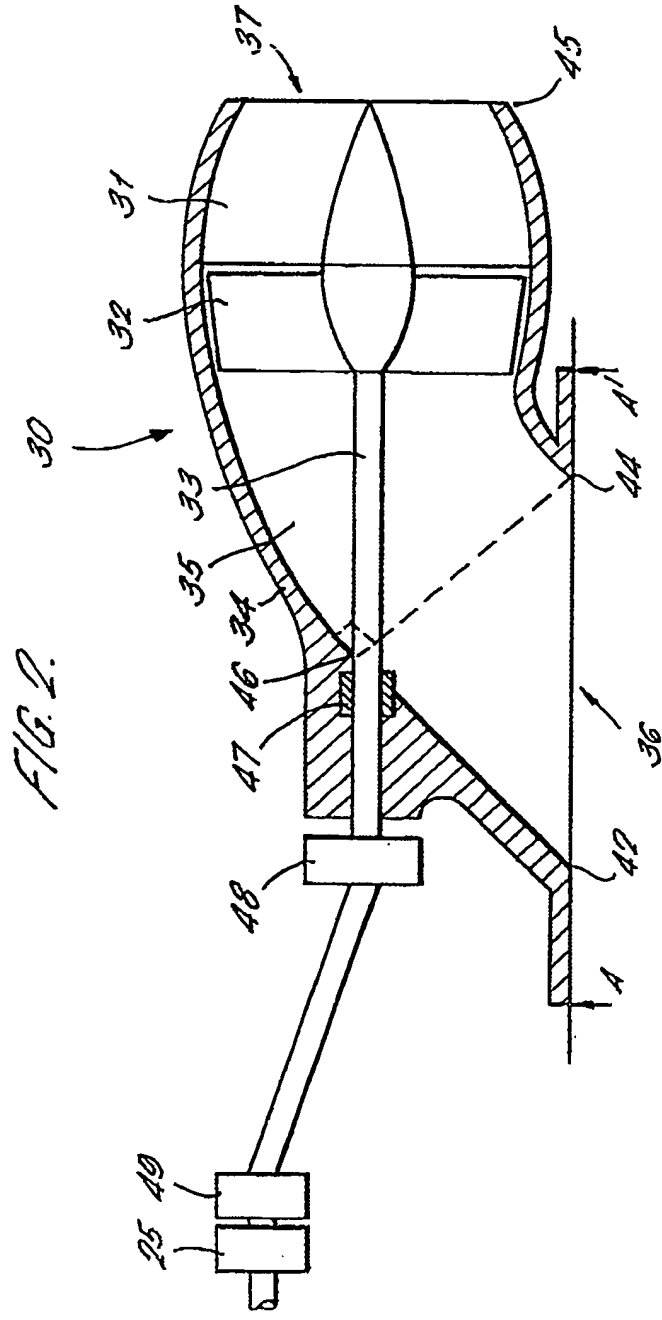

WO 2004/103810

PCT/CB2004/002135

3/4

FIG. 3.


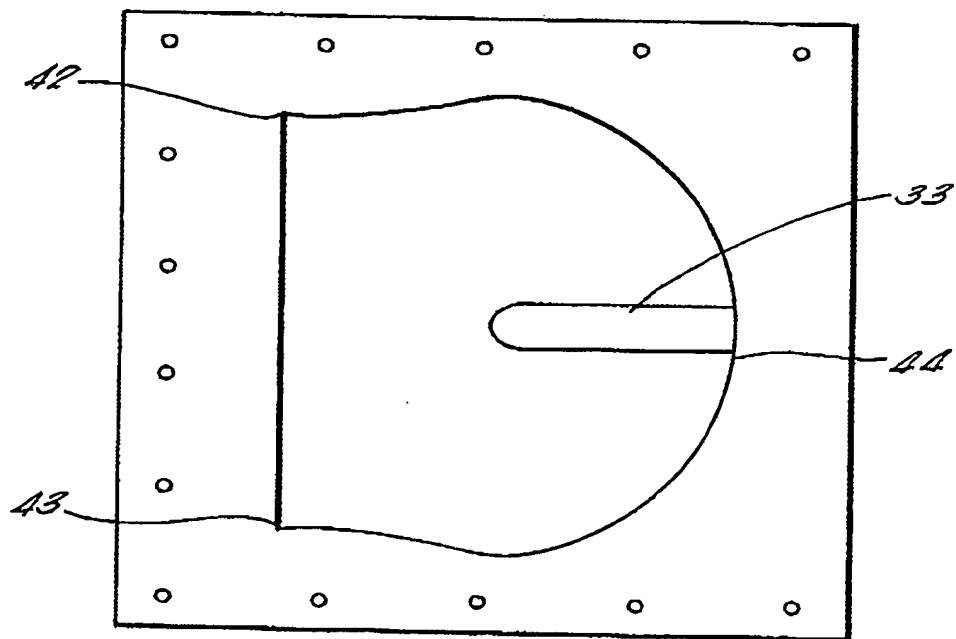


FIG. 4.

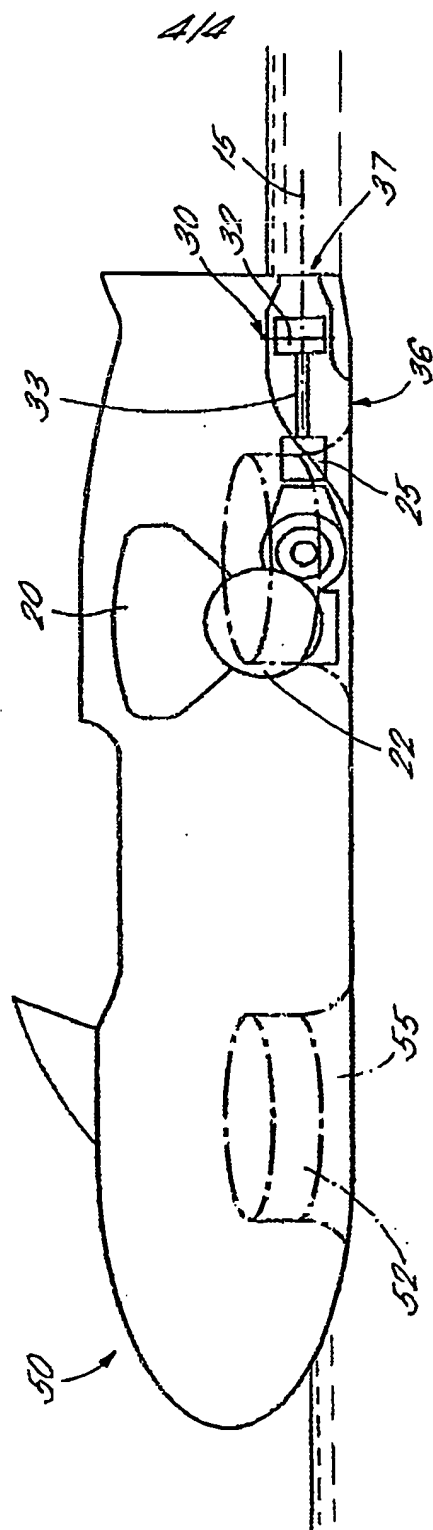

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB2004/002135

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B63H11/08 B60F3/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B63H B60F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FR 1 356 637 A (DOWTY TECHNICAL DEV LTD) 27 March 1964 (1964-03-27)	1-16, 21-23, 25-38
Y	page 1, left-hand column, lines 1-6; figures	17-20, 24
X	DE 198 31 324 A (LEHRBERGER ANDREAS) 20 January 2000 (2000-01-20)	1-16, 21-23, 25-38
Y	abstract; claims; figures	17-20, 24
X	US 5 649 843 A (ELGER GERD) 22 July 1997 (1997-07-22)	1-20, 29-34
Y	abstract; figures	21-28, 35-38
----- -/-		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- \*&\* document member of the same patent family

Date of the actual completion of the international search

19 August 2004

Date of mailing of the international search report

30/08/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5018 Patentkan 2  
NL - 2200 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 051 opo nl,  
Fax (+31-70) 340-3010

Authorized officer

Nicol, Y



## INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB2004/002135

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	US 6 273 768 B1 (BLANCHARD CLARENCE E) 14 August 2001 (2001-08-14) abstract; figures  -----	1-20, 29-34 21-28, 35-38

Form PCT/ISA/210 (continuation of second sheet) (January 2004)

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB2004/002135

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
FR 1356637	A	27-03-1964	NONE	
DE 19831324	A	20-01-2000	DE 19831324 A1	20-01-2000
			DE 29815500 U1	25-02-1999
US 5649843	A	22-07-1997	DE 4402558 A1	03-08-1995
			WO 9520520 A1	03-08-1995
			DE 59500892 D1	04-12-1997
			EP 0690806 A1	10-01-1996
			JP 11505485 T	21-05-1999
US 6273768	B1	14-08-2001	CA 2342650 A1	07-10-2001

Form PCT/ISA/210 (patent family annex) (January 2004)